



**EMAIR**

[www.emair.co.za](http://www.emair.co.za)

# FAN ASSISTED OUTLET





## VP4

- Comprising of a directional aluminium floor grille, housing and booster fans.
- Multiple EC Fan technology
- 220v Single phase supply
- Floor grille powder coated or natural anodised finish
- Adjustable pattern grille
- Housing powder coated black
- Variety of control options available -
  - On/Off control
  - Manual fan speed control
  - Variable speed control based on temperature
  - Variable speed control based on pressure
- Provides direct cooling to high density server racks
- Increases air supply to hot spot areas
- Can be used in open plan or cold isle applications

Variable airflow from 200 to 1000 l/s  
 Frames available to suit most raised access floor installations

Individual control for top and bottom half of rack

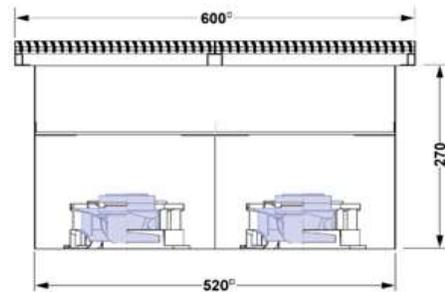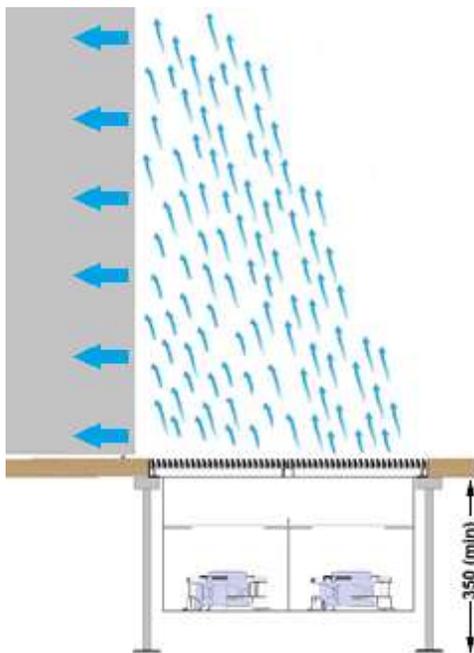

Flow l/s	200	300	400	500	600	700	800	900	1000
Amperage	0.16	0.28	0.53	0.96	1.45	2.15	3.20	4.30	4.60
Noise level dB[A]	48	55	60	65	69	72	75	77	80

dB[A] level is sound pressure level of unit measured 1.5m above floor in open area